



MODUX FOUR STEPLIGHT

Specifications

LED	Screw Mounted 4W 6vf Cree XHP50 LED
Power	4 Watt
Output	360lm, 90 lm/w
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Cable	H05RN-F 1m
Ingress Protection	IP68
Warranty	Electronics = 5 years (Excludes third party lamps and power supplies) Aluminium = 5 years Copper = 10 years Stainless Steel = 10 years
Standards	CE UL676 UL1598 UL1838 UL2108

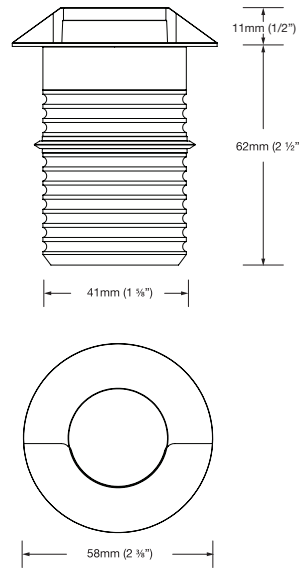

*Delivered from the luminaire with an unobstructed beam

Product Configuration

M4SL M4SLS

Power	Material/Finish	Colour	Accessories
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<p>R Constant Current Input, Series Wired, 4W Requires Constant Current Driver (not supplied). Fixture Input: 3Vf @ 700mA maximum.</p> <p>IA 12VAC Input, Parallel Wired, 4W Requires Magnetic/Wire Wound 12VAC Transformer (not supplied). Fixture Input: 12VAC, 4W (700mA).</p> <p>ID 24VDC Input, Parallel Wired, 4W Requires 24VDC Constant Voltage Power Supply (not supplied). Fixture Input: 24VDC, 4W (700mA).</p>	<p>Powder Coated Aluminium</p> <p>A</p> <ul style="list-style-type: none"> EBK Black EBZ Bronze EOGR Olive green EWH White EWB White Birch EDG Dark Grey ESTAR Silver Star ECT Corten FS Fine Silver <p>Solid Metal Options</p> <ul style="list-style-type: none"> C Solid Copper AC Aged Solid Copper S 316 Stainless Steel EPS Electropolished 316 Stainless Steel 	<ul style="list-style-type: none"> 2 2700K 3 3000K 4 4000K 	<ul style="list-style-type: none"> PCAN PVC Canister DCAN Deck Canister SCAN Security Canister ACAN Aluminium Canister ALFC Aluminium Floor Mount Canister RP Recessed Plug

Luminaire Information

CNC machined from the following materials

Powder Coated Aluminium

Virgin, high corrosion resistant, low copper content (0.001%) aluminium with chromate substrate, and a highly UV-resistant polyester powder coat.

Solid Copper

110 high-purity copper alloy with a minimum copper content of 99.9%. Due to the nature of copper, it patinas over time. This patina acts as a protective layer that prevents further corrosion and enhances the metal's resistance to the elements.

316 Stainless Steel

316 Stainless Steel with high corrosion resistance and superior resistance against rust and abrasion.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Lens

Extra clear, low iron, shatter resistant

Mounting

Recessed canisters make installation easy—core a hole or cast the canister in place, then push in the fitting. A silicone wiper seal holds the luminaire securely.

Load Rating

Aluminium	Not suitable for drive over applications!
Copper	Not suitable for drive over applications!
Stainless Steel	4000kg/11000lbs


Accessories




Wiring Guide

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.

Circuit: Wire in Series With Remote Driver

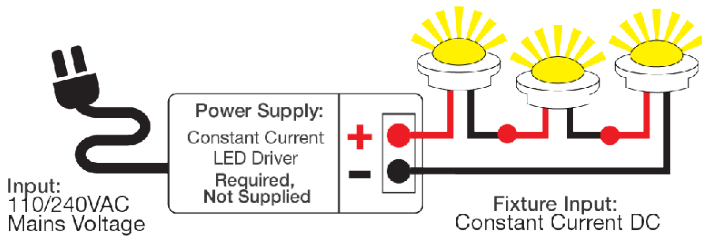

Circuit: 12VAC - Wire in Parallel

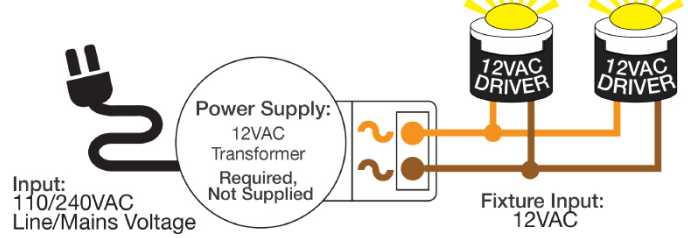

Circuit: 24VDC - Wired In Parallel

