




M2 SPOT LIGHT

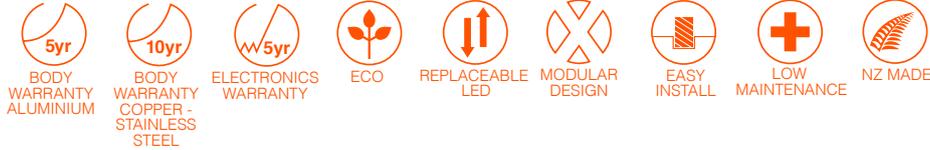

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Power	Flange	Driver	Material	Beam	Colour	Accessories
M2						
M2 2 Watt	SP Spot GG Glare Guard SN Snoot	R Remote (series) I* Integral (12VAC)* I* Integral (24VDC)*	C Copper S Stainless Steel A Aluminium* BK Black BZ Bronze W White	26 26° 36 36° 74 74°	27 2700K 30 3000K 40 4000K R Red G Green B Blue A Amber	F Frosted H Hexcell B Bracket BS Bracket & Spike TM Tree Mount Bracket ST Bracket & Stake WB Weighted Base* <small>*not available in aluminium</small>

*When ordering, please specify AC or DC options.

*Please specify powder-coat colour when ordering an aluminium luminaire.

MODUX TWO BRACKET & SPIKE

SPECIFICATIONS

Power	2 Watt
Ingress Protection Rating	IP68
Cable	H05RN-F 2x 0.75mm (1m)
Material	- Black/ White/Bronze Powdercoated Aluminium - Natural Copper - 316 Stainless Steel
Lens Options	Clear or Frosted
Hexcell Louvre	Hexcell Louvre available
Colour Temperature Options	Warm White - 2700K and 3000K Neutral White - 4000k
Removable Light Engine (LED)	Screw Mounted 2W Cree™ XPG-3 Chip
Optic Degrees	26°, 36°, 74°
CRI	90+ CRI
Efficiency	85lm/w - Delivered from Luminaire with unobstructed beam
Input Options	700mA Constant current (Remote) 12V AC (Integral) 24V DC (Integral)
Warranty	Electronics Warranty - 5 Years Aluminum Body - 5 Years Copy and Stainless Steel Body Warranty - 10 Years
LED Shield	LED Bypass Shunt LED Reverse Polarity Protection
LED Life Expectancy	50,000 Hours

Weighted Base Remote/Constant Current options are not suitable for underwater use.

