


MODUX FOUR HANGING LIGHT

Specifications

LED	Screw Mounted 4W 6Vf Cree XHP50 LED
Power	4 Watt
Output*	375lm, 94 lm/w
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Ingress Protection	IP68
Warranty	Electronics = 5 years (Excludes third party lamps and power supplies) Aluminium = 5 years Brass = 10 years Stainless Steel = 10 years

Standards

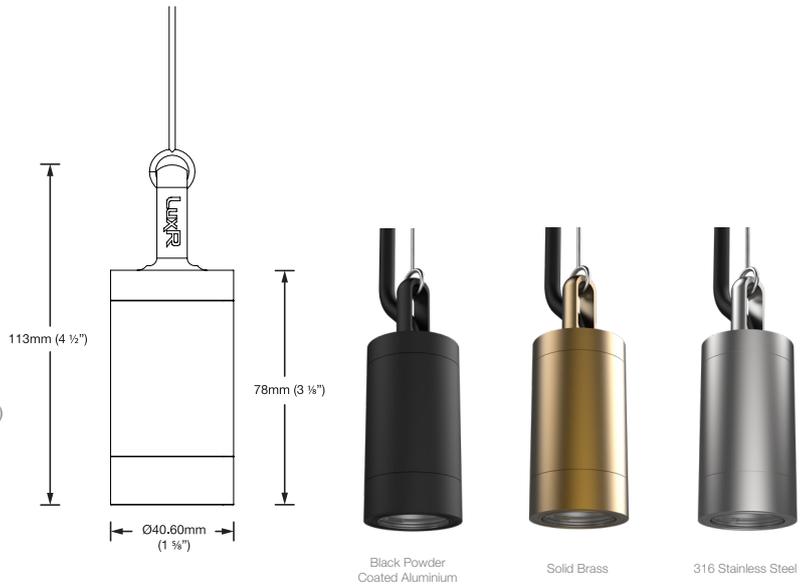

*Delivered from the luminaire with an unobstructed beam

Product Configuration

○ M4HL

Power	Material/Finish	Beam	Colour	Accessories
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<p>R Constant Current Input, Series Wired, 4W Requires Constant Current Driver (not supplied). Fixture Input: 6Vf @ 700mA maximum.</p> <p>IA 12VAC Input, Parallel Wired, 4W Requires Magnetic/Wire Wound 12VAC Transformer (not supplied). Fixture Input: 12VAC, 4W (700mA).</p> <p>ID 24VDC Input, Parallel Wired, 4W Requires 24VDC Constant Voltage Power Supply (not supplied). Fixture Input: 24VDC, 4W (700mA).</p>	<p>Powder Coated Aluminium</p> <p>A</p> <ul style="list-style-type: none"> EBK Black EBZ Bronze EOGR Olive green EWH White EWB White Birch EDG Dark Grey ESTAR Silver Star ECT Corten FS Fine Silver <p>Solid Metal Options</p> <ul style="list-style-type: none"> B Solid Brass AB Aged Solid Brass S 316 Stainless Steel EPS Electropolished 316 Stainless Steel 	<ul style="list-style-type: none"> 26 26 Degrees 36 36 Degrees 74 74 Degrees 	<ul style="list-style-type: none"> 2 2700K 3 3000K 4 4000K 	<ul style="list-style-type: none"> F Frosted Lens H Hex Cell Louvre GG Glare Guard SNT Snoot

Luminaire Information

CNC machined from the following materials

Powder Coated Aluminium

Virgin, high corrosion resistant, low copper content (0.001%) aluminium with chromate substrate, and a highly UV-resistant polyester powder coat.

Solid Brass

Virgin C38500 brass alloy made from copper, zinc, and lead with a warm gold-en colour. Naturally patinas over time to form a protective layer that improves corrosion resistance and durability.

316 Stainless Steel

316 Stainless Steel with high corrosion resistance and superior resistance against rust and abrasion.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Lens

Extra clear, low iron, shatter resistant

Mounting

Hung via the provided stainless steel 3m hanging wire.

Accessories



Frosted Lens



Hex Cell Louvre




Glare Guard




Snout

Beam Angle


Beam angles shown are based on 3000K. For other colours and full photometric data, IES files are available for download from our website.

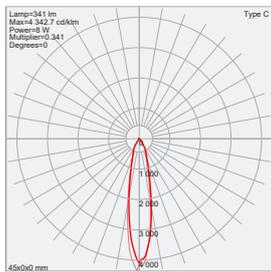

26°

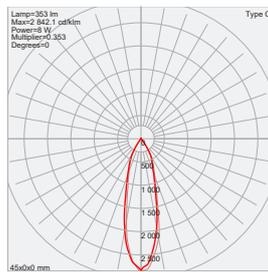

36°

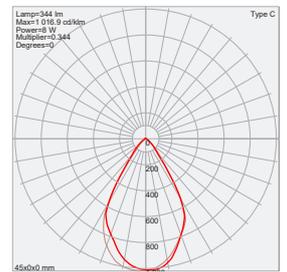


74°

Wiring Guide

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.


Circuit: Wire in Series With Remote Driver

Please see installation instructions for full details.

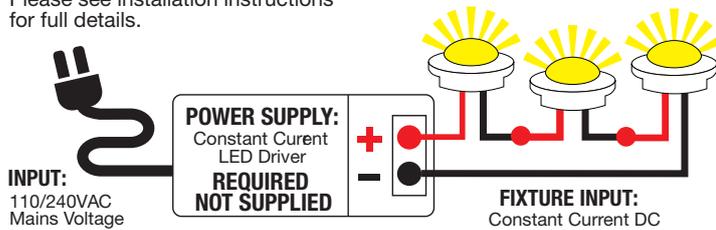

Circuit: 12VAC - Wire in Parallel

Please see installation instructions for full details.

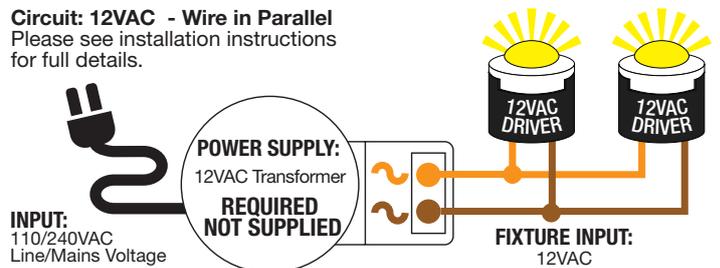

Circuit: 24VDC - Wired In Parallel

Please see installation instructions for full details.

