


# MODUX ONE TWIN POLE LIGHT

## Specifications

<b>LED</b>	Pin mounted 1W 3Vf Cree XPG-3 LED
<b>Power</b>	2 Watt
<b>Output</b>	160 lm/w*
<b>LED Life Expectancy</b>	50,000 hours L70
<b>CRI (3000K)</b>	90+
<b>Warranty</b>	Electronics = 5 years (Excludes third party lamps and power supplies) Aluminium = 5 years Copper = 10 years Stainless Steel = 10 years

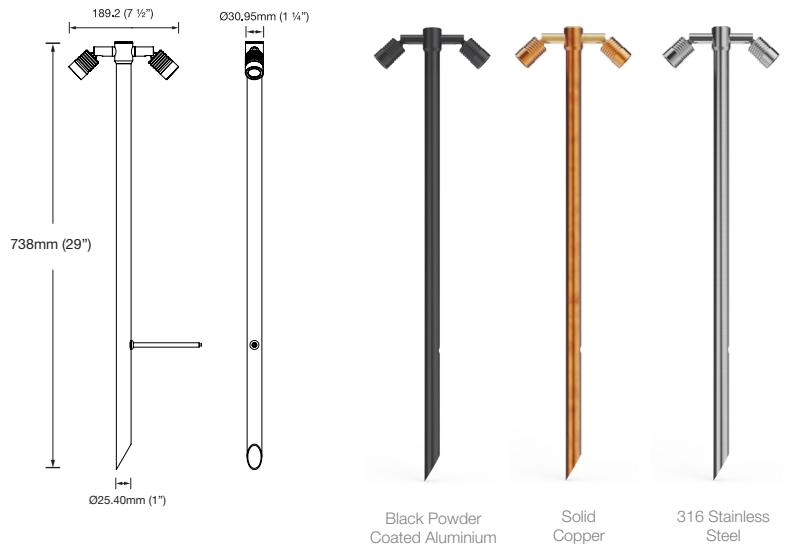

### Standards

\*Delivered from the luminaire with an unobstructed beam

## Product Configuration

○ M1TP

Power	Material/Finish	Beam	Colour	Accessories
<input type="checkbox"/> R Constant Current Input, Series Wired, 2W Requires Constant Current Driver (not supplied). Fixture Input: 3Vf @ 350mA maximum.	<input type="checkbox"/> A Powder Coated Aluminium	<input type="checkbox"/> 30 30 Degrees <input type="checkbox"/> 53 53 Degrees <input type="checkbox"/> 50+17 50+17 Degrees	<input type="checkbox"/> 2 2700K <input type="checkbox"/> 3 3000K <input type="checkbox"/> 4 4000K <input type="checkbox"/> A Amber <input type="checkbox"/> B Blue <input type="checkbox"/> G Green <input type="checkbox"/> R Red	<input type="checkbox"/> F Frosted Lens <input type="checkbox"/> GG Glare Guard <input type="checkbox"/> FM Flange Mount
<input type="checkbox"/> IA 12VAC Input, Parallel Wired, 2W Requires Magnetic/Wire Wound 12VAC Transformer (not supplied). Fixture Input: 12VAC, 2W (350mA).	<input type="checkbox"/> EBK Black <input type="checkbox"/> EBZ Bronze <input type="checkbox"/> EOGR Olive green <input type="checkbox"/> EWH White <input type="checkbox"/> EWB White Birch <input type="checkbox"/> EDG Dark Grey <input type="checkbox"/> ESTAR Silver Star <input type="checkbox"/> ECT Corten <input type="checkbox"/> FS Fine Silver			
<input type="checkbox"/> ID 24VDC Input, Parallel Wired, 2W Requires 24VDC Constant Voltage Power Supply (not supplied). Fixture Input: 24VDC, 2W (350mA).	<input type="checkbox"/> C Solid Copper <input type="checkbox"/> AC Aged Solid Copper <input type="checkbox"/> S 316 Stainless Steel <input type="checkbox"/> EPS Electropolished 316 Stainless Steel			

# Luminaire Information

CNC machined from the following materials

## Powder Coated Aluminium

Virgin, high corrosion resistant, low copper content (0.001%) aluminium with chromate substrate, and a highly UV-resistant polyester powder coat.

## Solid Copper

110 high-purity copper alloy with a minimum copper content of 99.9%. Due to the nature of copper, it patinas over time. This patina acts as a protective layer that prevents further corrosion and enhances the metal's resistance to the elements.

## 316 Stainless Steel

316 Stainless Steel with high corrosion resistance and superior resistance against rust and abrasion.

## Gaskets

Silicone, iron impregnated 220°C (428°F).

## Mounting

Pole is inserted directly into the earth. Flange Mount is available for mounting to hard surfaces.

# Accessories



Frosted Lens



Flange Mount




Glare Guard

# Wiring Guide

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.


## Circuit: Wire in Series With Remote Driver

Please see installation instructions for full details.

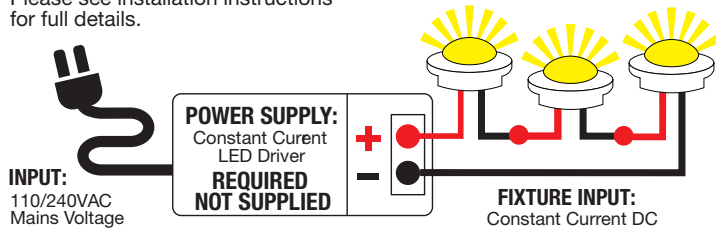

## Circuit: 12VAC - Wire in Parallel

Please see installation instructions for full details.

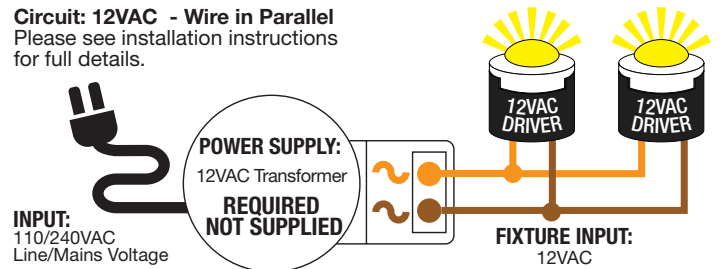

## Circuit: 24VDC - Wired In Parallel

Please see installation instructions for full details.

