



MODUX TWO PATHLIGHT

Specifications

LED	Screw Mounted 2W 3vf Cree XPG-3 LED
Power	2 Watt
Output	180lm, 90 lm/w
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Ingress Protection	IP68
Warranty	Electronics = 5 years (Excludes third party lamps and power supplies) Copper = 10 years Stainless Steel = 10 years
Standards	CE, UL676 UL1598 UL1838 UL2108


*Delivered from the luminaire with an unobstructed beam

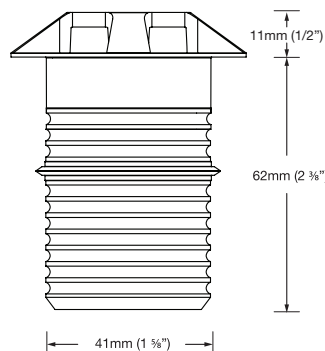

Copper



Stainless Steel



Product Configuration

○ M2PL1 ○ M2PL180 ○ M2PLOP ○ M2PL3 ○ M2PL4

Power



- R** Constant Current Input, Series Wired, 2W
Requires Constant Current Driver (not supplied).
Fixture Input: 3Vf @ 700mA maximum.
- IA** 12VAC Input, Parallel Wired, 2W
Requires Magnetic/Wire Wound 12VAC Transformer (not supplied).
Fixture Input: 12VAC, 2W (700mA).
- ID** 24VDC Input, Parallel Wired, 2W
Requires 24VDC Constant Voltage Power Supply (not supplied).
Fixture Input: 24VDC, 2W (700mA).

Material/Finish



- Solid Metal Options
- C** Solid Copper
 - AC** Aged Solid Copper
 - S** 316 Stainless Steel
 - EPS** Electropolished 316 Stainless Steel

Colour



- 2** 2700K
- 3** 3000K
- 4** 4000K
- A** Amber
- B** Blue
- G** Green
- R** Red

Accessories



- PCAN** PVC Canister
- DCAN** Deck Canister
- SCAN** Security Canister
- ACAN** Aluminium Canister
- ALFC** Aluminium Floor Mount Canister
- RP** Recessed Plug

Luminaire Information

CNC machined from the following materials

Solid Copper

110 high-purity copper alloy with a minimum copper content of 99.9%. Due to the nature of copper, it patinas over time. This patina acts as a protective layer that prevents further corrosion and enhances the metal's resistance to the elements.

316 Stainless Steel

316 Stainless Steel with high corrosion resistance and superior resistance against rust and abrasion.

Gaskets

Silicone, iron impregnated 220°C (228°F).

Lens

Extra clear, low iron, shatter resistant

Mounting

Recessed canisters make installation easy—core a hole or cast the canister in place, then push in the fitting. A silicone wiper seal holds the luminaire securely.

Load Rating

Copper	Not suitable for drive over applications!
Stainless Steel	5000kg/11000lbs

Accessories



PVC Canister



Deck Mount Canister



Security Canister





Aluminium Canister





Aluminium Floor Mount Canister

Beam Angle



Beam angles shown are based on 3000K. For other colours and full photometric data, IES files are available for download from our website.





PL1




PL180



PLOP



PL3




PL2


Wiring Guide

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.

Circuit: Wire in Series With Remote Driver

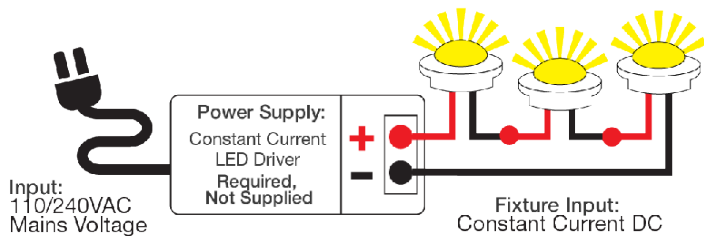

Circuit: 12VAC - Wire in Parallel

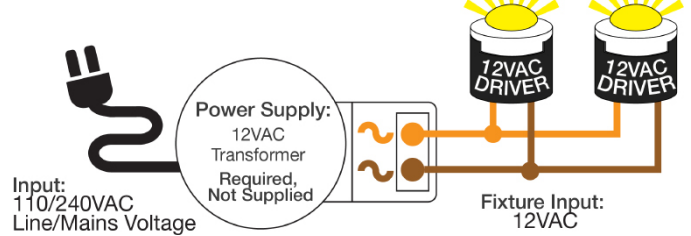

Circuit: 24VDC - Wired In Parallel

